

NH FUSE LINKS (HRC)

NH FUSE LINKS aM 500V & 690V WITH STRIKER

aM500V-690V

NH FUSE LINKS aM 500V & 690V WITH STRIKER

I_n (A)	REFERENCE	U (V)	BREAKING CAPACITY (kA)	PACKING Uni./BOX
--------------	-----------	----------	---------------------------	---------------------

NH0 S

T-0

32	398135	690	80	3/60
35	398140	690	80	3/60
40	398145	690	80	3/60
50	398150	690	80	3/60
63	398155	690	80	3/60
80	398160	690	80	3/60
100	398165	690	80	3/60
125	398170	690	80	3/60
160	398175	690	80	3/60
200	397180	500	120	3/60



398175

NH1

T-1

80	398240	690	80	3/60
100	398245	690	80	3/60
125	398250	690	80	3/60
160	398255	690	80	3/60
200	398260	690	80	3/60
250	397270	500	120	3/60



398250

NH FUSE LINKS (HRC)

NH FUSE LINKS aM 500V & 690V WITH STRIKER

aM500V-690V

I_n (A)	REFERENCE	U (V)	BREAKING CAPACITY (kA)	PACKING Uni./BOX
--------------	-----------	----------	---------------------------	---------------------

NH2

T-2

125	398340	690	80	3/24
160	398345	690	80	3/24
200	398350	690	80	3/24
250	398360	690	80	3/24
315	398370	690	80	3/24
355	398375	690	80	3/24
400	397380	500	120	3/24



398360

NH3

T-3

400	398455	690	80	3/18
425	398460	690	80	3/18
500	398465	690	80	3/18
630	397470	500	120	3/18



398455

NH4

T-4

315	397505	500	120	1/6
400	397510	500	120	1/6
500	397515	500	120	1/6
630	397520	500	120	1/6
800	397525	500	120	1/6
1000	397530	500	120	1/6
1250	397535	500	120	1/6



397530

NH FUSE LINKS (HRC)

DIMENSIONS

gL/gG-aM

NH FUSE LINKS gG 500V TOP INDICATOR

SIZE	A	B	C	D	E	F	G	H	I	J	K	L
NH000	49	44,5	53	78,5	15	9,8	9,2	6	21	35	40	50
NH00	49	45	53	78,5	15	9,8	9,2	6	30	35	45	59
NH0	68	62	67	125	15	9,8	9,2	6	30	35	45	59
NH0 S	66	62	66,5	125	15	9,8	9,5	6	39	35	47	59
NHC1	68	62	68	135	20	9,8	9,2	6	30	40	45	64
NH1	68	62	71	135	20	9,8	9,2	6	50	40	50	64
NHC2	68	62	71	150	20	9,8	9,2	6	50	58	50	72
NH2	68	62	71	150	25	9,8	9,2	6	58	58	58	72
NHC3	68	62	71	150	26	9,8	9,2	6	58	60	58	84
NH3	68	62	72	150	32	9,8	9,2	6	67	60	67	82
NH4	68	62	76	200	50	9,8	10	8	102	87	105	120

NH FUSE LINKS gG/aM 500V DUAL INDICATOR

SIZE	A	B	C	D	E	F	G	H	I	J	K	L
NH000	49	45	53	79	15	9,8	9,5	6	21	35	41	53
NH00	49	44	53	79	15	9,8	9,5	6	30	35	47	59
NH0	66	61	67	125	15	9,8	9,5	6	30	35	47	60
NHC1	68	62	70	135	15	9,8	9,5	6	30	40	47	65
NH1	68	62	72	135	20	9,8	9,2	6	40	40	52	64
NHC2	68	62	72	150	20	9,8	9,5	6	40	48	52	72
NH2	68	62	72	150	25	9,8	9,5	6	54	48	60	72
NHC3	68	62	72	150	26	9,8	9,5	6	54	60	60	85
NH3	68	62	72	150	32	9,8	9,5	6	70	60	75	86

NH FUSE LINKS gG/aM WITH STRIKER

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
NH0S	66	62	66,5	125	15	9,8	9,5	6	39	35	47	59	15	29	14,5	14
NH1	68	62	72	135	20	9,8	9,5	6	43	40	52	64	15	29	16	14,5
NH2	68	62	71,5	150	25	9,8	9,5	6	54	48	60	72	15	29	19	14,5
NH3	68	61,5	72	150	32	9,8	9,5	6	70	60	75	86	15	29	24	14,5
NH4	68	62	76	200	50	9,8	10	8	102	87	105	120	15	39	27,5	14,5


NH FUSE LINKS (HRC)

NH FUSE LINKS aM 500V & 690V DUAL INDICATOR & STRIKER


t-I CHARACTERISTICS
CUT-OFF CHARACTERISTICS

aM500V-690V

t-I CHARACTERISTICS

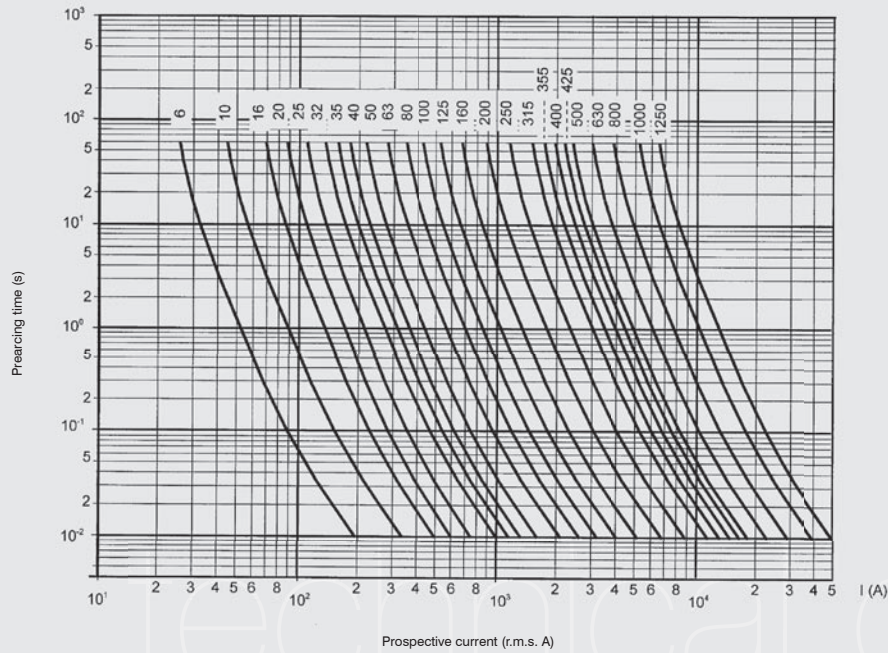

CUT-OFF CHARACTERISTICS

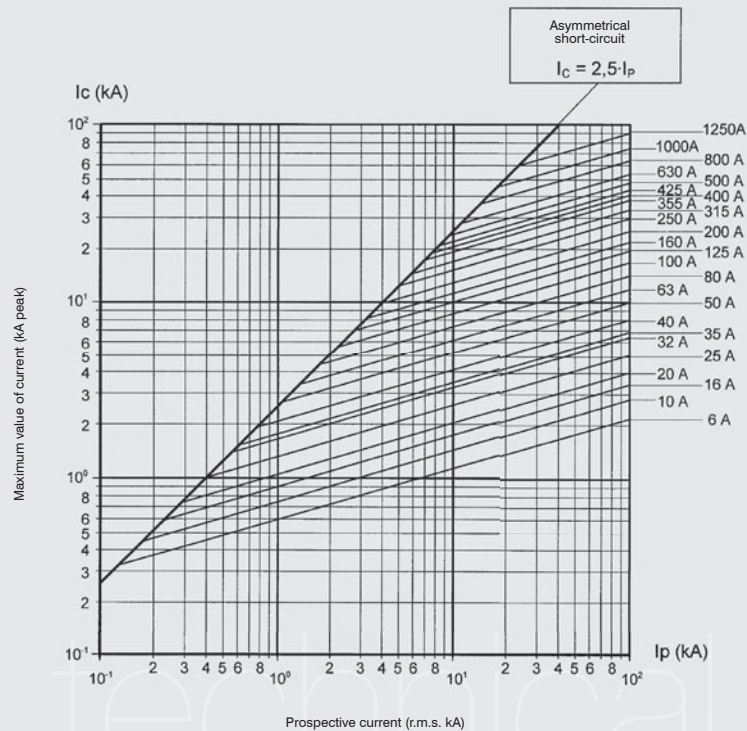

NH FUSE LINKS (HRC)


NH FUSE LINKS aM 500V & 690V DUAL INDICATOR & STRIKER

I²t CHARACTERISTICS

POWER DISSIPATION

aM500V-690V

I²t CHARACTERISTICS

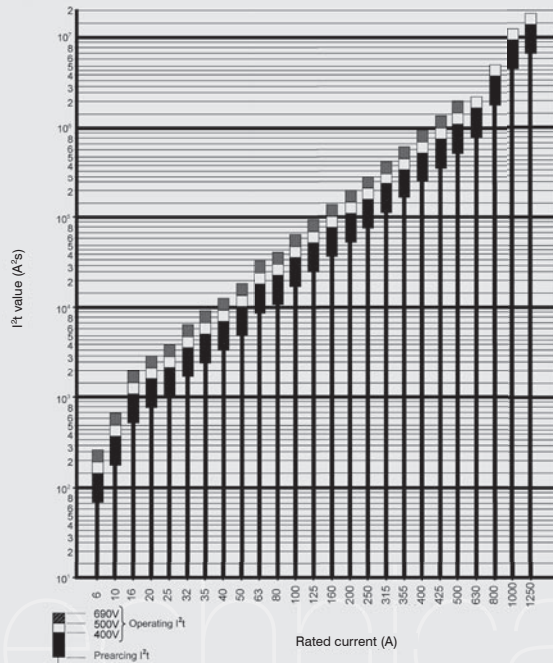

POWER DISSIPATION

I _n (A)	SIZE						
	NH000 (W)	NH00 (W)	NH0(OS) (W)	NH1 (W)	NH2 (W)	NH3 (W)	NH4 (W)
6	0,33	–	0,42	–	–	–	–
10	0,52	–	0,67	–	–	–	–
16	0,81	–	0,98	–	–	–	–
20	0,92	–	1,04	–	–	–	–
25	1,08	–	1,17	–	–	–	–
32	1,42	–	1,67	–	–	–	–
35	1,58	–	1,72	–	–	–	–
40	1,68	–	1,91	–	–	–	–
50	–	2,28	2,51	–	–	–	–
63	–	2,90	3,35	3,2	–	–	–
80	–	4,19	4,93	4,6	–	–	–
100	–	5,09	5,72	5,7	–	–	–
125	–	6,29	7,30	6,98	7,6	–	–
160	–	7,73	9,5	9,2	9,7	–	–
200	–	–	12,3	13,7	13,9	–	–
224	–	–	–	14,0	14,0	–	–
250	–	–	–	15,3	17,0	–	–
315	–	–	–	–	26,0	20,6	18,8
355	–	–	–	–	25,2	23,9	–
400	–	–	–	–	29,3	26,5	23,5
425	–	–	–	–	–	28,3	–
500	–	–	–	–	–	35,8	34
630	–	–	–	–	–	56,9	49
800	–	–	–	–	–	–	70
1000	–	–	–	–	–	–	80
1250	–	–	–	–	–	–	108