

F

fuse links



Cd-Pb FREE

RoHS compliant
DIRECTIVE 2002/95/EC

INDUSTRIAL CYLINDRICAL FUSE LINKS

gR FUSE LINKS FOR PHOTOVOLTAIC APPLICATIONS



gR


gR FUSE LINKS FOR PHOTOVOLTAIC APPLICATIONS

I_n (A)	REFERENCE	U (V)	BREAKING CAPACITY (kA)	PACKING Unit/BOX
10x38				
2	491602	900	30	10/100
3	491604	900	30	10/100
4	491605	900	30	10/100
6	491610	900	30	10/100
8	491615	900	30	10/100
10	491620	900	30	10/100
12	491625	900	30	10/100
16	491630	900	30	10/100
20	491635	900	30	10/100



491635

DIMENSIONS

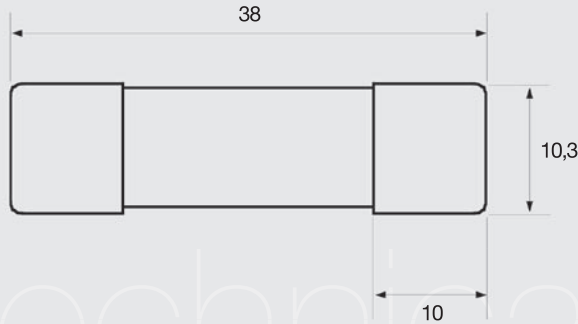


technical data

INDUSTRIAL CYLINDRICAL FUSE LINKS

gR FUSE LINKS FOR PHOTOVOLTAIC APPLICATIONS

gR

gR t-I CHARACTERISTICS

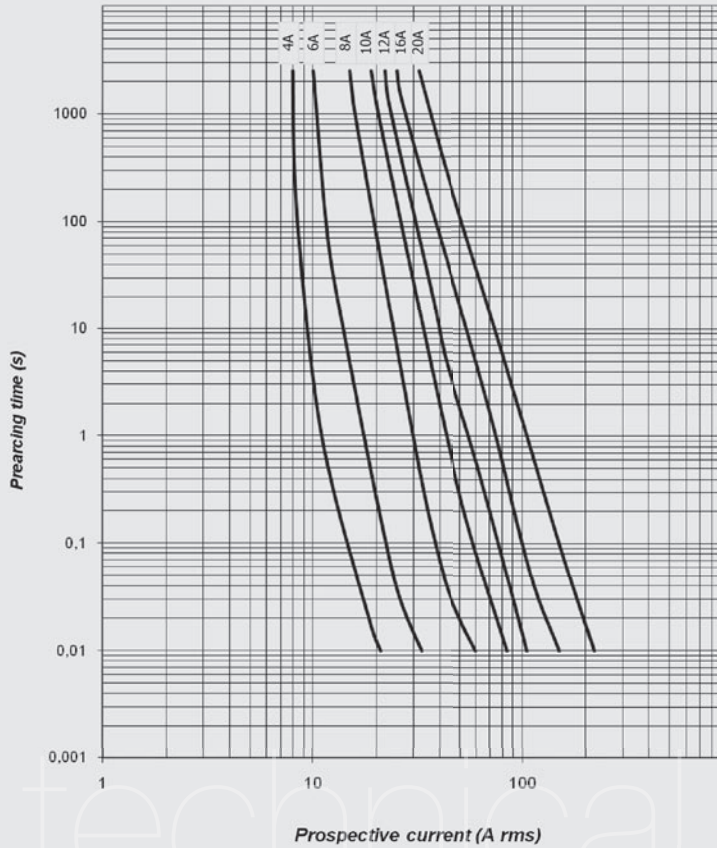

TECHNICAL DATA

RATED CURRENT (A)	REFERENCE	POWER DISSIPATION (W @ 0,8 In)	POWER DISSIPATION (W @ In)	PREARcing I ² t (A ² s)	OPERATING I ² t 900V (A ² s)
4	491605	1,10	1,85	4	15
6	491610	1,45	2,50	9	42
8	491615	0,95	1,60	12	49
10	491620	1,25	2,15	19	69
12	491625	1,40	2,40	28	97
16	491630	1,80	3,10	48	178
20	491635	2,20	3,80	69	248